


FiberRack Power FLR-16PS

Redundant Power Supply

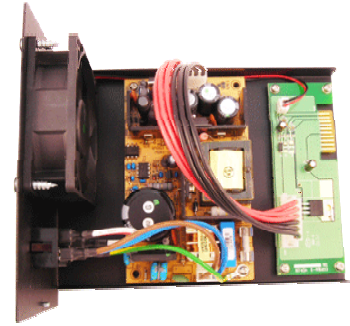

Specifications

Model	FLR-16-PS
Description	For use in FLR-16 Converter Chassis
	Install max. two pcs redundant power
Dimension	150mm*180mm*90mm (W*D*H)
Power Requirement	AC 90~260, 2A, 50~60Hz
Power Output	5V DC, 12A
Environment	Temperature: 0~50°C (operating) ; -20~70° C (storage)
	Humidity:0~90%(non-condensing)
Regulatory Compliance	FCC & CE

Ordering Information

FLR-16-PS: Redundant Power Supply (for FLR-16 Converter Chassis)

** Product specification subject to change without notice.*