

# PoE-808WS

## 8 Port 10/100Mbps Web-Managed PoE Switch, w/8 PSE port

### Overview

The PoE-808WS is 8-port 10/100M PoE Web-Smart Switch that is designed for small or medium network environment to strengthen its network connection. This product is compact in size, making it ideal for Desktop users with limited space. It also gives you the option of installing it in a 19" cabinet by rack-mount kits or underneath a desk.



### IEEE 802.3af Power over Ethernet (PoE) ports

PoE-808WS features 8 IEEE 802.3af Power over Ethernet (PoE) ports supplying up to 15.4 watts per port. This product can convert standard 100~240V/AC power into low-voltage DC that runs over existing LAN cable to power up IEEE 802.3af compliant network accessories. It also features PoE awareness to verify whether the network device receive power is IEEE 802.3af compliant, or only the data will be sent through LAN cable. By adding PoE-808WS to existing networking, installing networking products such as Access Points and IP cameras can be easily managed and set up. Wireless device deployments are easily located with available power outlets and network administrators don't need to use heavy AC power adapters anymore.

### Exceptionally Smart

PoE-808WS 8-port PoE Web-Smart Fast Ethernet Switch features management ports that can be managed through Web Browser and provides Smart features that are ideal for simple QoS/CoS applications and basic monitoring tools to improve network efficiency. Its security and management features, such as bandwidth control, and VLAN (IEEE 802.1Q VLAN tagging and port-based VLAN) to secure your network. Through a Web-based interface, an administrator can set up VLANs to segregate traffic, QoS to prioritize mission-critical data and link aggregation to create fat traffic pipelines. All of these features offer extra protection on the network edge. Best of all, the password-protected configuration interface can be accessed remotely.

### Toplink C&C Corporation


3F, No. 4, Lane 609, Sec. 5, Chung Hsin Rd.,  
San Chung City, Taipei Hsien 241, Taiwan, R. O. C.  
Email: sales@linkpro.com.tw Tel: 886-2-22789851 (REP.)  
<http://www.linkpro.com.tw>

**Specifications**

<b>Standards</b>	<ul style="list-style-type: none"> <li>● IEEE 802.3 10BaseT</li> <li>● IEEE 802.3u 100BaseTX</li> <li>● IEEE 802.3x Flow Control</li> <li>● IEEE 802.3ad Trunk (Link Aggregation)</li> <li>● IEEE 802.3af Power Over Ethernet (PoE)</li> <li>● IEEE 802.1q VLAN (Port Based and Tag Based)</li> <li>● IEEE 802.1p Class of Service, Priority Protocols</li> <li>● IEEE 802.1x</li> <li>● IEEE 802.1d Spanning Tree Protocol</li> <li>● IEEE 802.1w Rapid Spanning Tree Protocol</li> </ul>
<b>Features</b>	<ul style="list-style-type: none"> <li>● Number of Ports: 8 PSE/Power over Ethernet Ports</li> <li>● MAC Address: 4K</li> <li>● Buffer Memory: 1.625M bits</li> </ul>
<b>Smart Features</b>	<ul style="list-style-type: none"> <li>● Port VLAN: 8</li> <li>● Tagged VLAN: 4094</li> <li>● Trunk Groups : 2 (1~4 port for each group)</li> <li>● Quality of Service: up to 4 queues</li> <li>● PoE function ON/OFF Remote Control</li> <li>● STP/RSTP (Spanning Tree Protocol and Rapid Spanning Tree Protocol)</li> <li>● MAC Filtering</li> <li>● IGMP Snooping v1/v2</li> <li>● Management: Broadcast Storm Control, Bandwidth Control, Port Mirroring, Password-protected Access, Port Settings, Web-base Management, Graphic User Interface...etc.</li> </ul>
<b>Filtering/Forwarding Rates</b>	<ul style="list-style-type: none"> <li>● 10Mbps port - 14,880pps</li> <li>● 100Mbps port - 148,800pps</li> </ul>
<b>Transmission Media</b>	<ul style="list-style-type: none"> <li>● 100BaseTX Cat. 5 UTP/STP</li> <li>● 10BaseT Cat. 3, 4, 5 UTP/STP</li> </ul>

<b>Led Indicators</b>	<ul style="list-style-type: none"> <li>● Per Unit: Power</li> <li>● Per Port: Link / Act</li> </ul>
<b>Power Input</b>	<ul style="list-style-type: none"> <li>● 100~240V/AC, 50~60Hz</li> </ul>
<b>Power Output</b>	<ul style="list-style-type: none"> <li>● 48V/DC Per Port Output – 15.4 W Max Per Port</li> <li>● 8 Ports at Full 15.4 W Output Supported per port</li> </ul>
<b>Power Consumption</b>	<ul style="list-style-type: none"> <li>● 130 Watts (Max)</li> </ul>
<b>Dimensions</b>	<ul style="list-style-type: none"> <li>● 266 x 160 x 44 mm (L x W x H)</li> </ul>
<b>Weight</b>	<ul style="list-style-type: none"> <li>● 1.4 kg</li> </ul>
<b>Operating Temperature</b>	<ul style="list-style-type: none"> <li>● 0 to 50°C</li> </ul>
<b>Storage Temperature</b>	<ul style="list-style-type: none"> <li>● -20 to 90°C</li> </ul>
<b>Humidity</b>	<ul style="list-style-type: none"> <li>● 10 to 90% RH (non-condensing)</li> </ul>
<b>Regulatory Compliance</b>	<ul style="list-style-type: none"> <li>● FCC Class A, CE,LVD</li> </ul>

Application

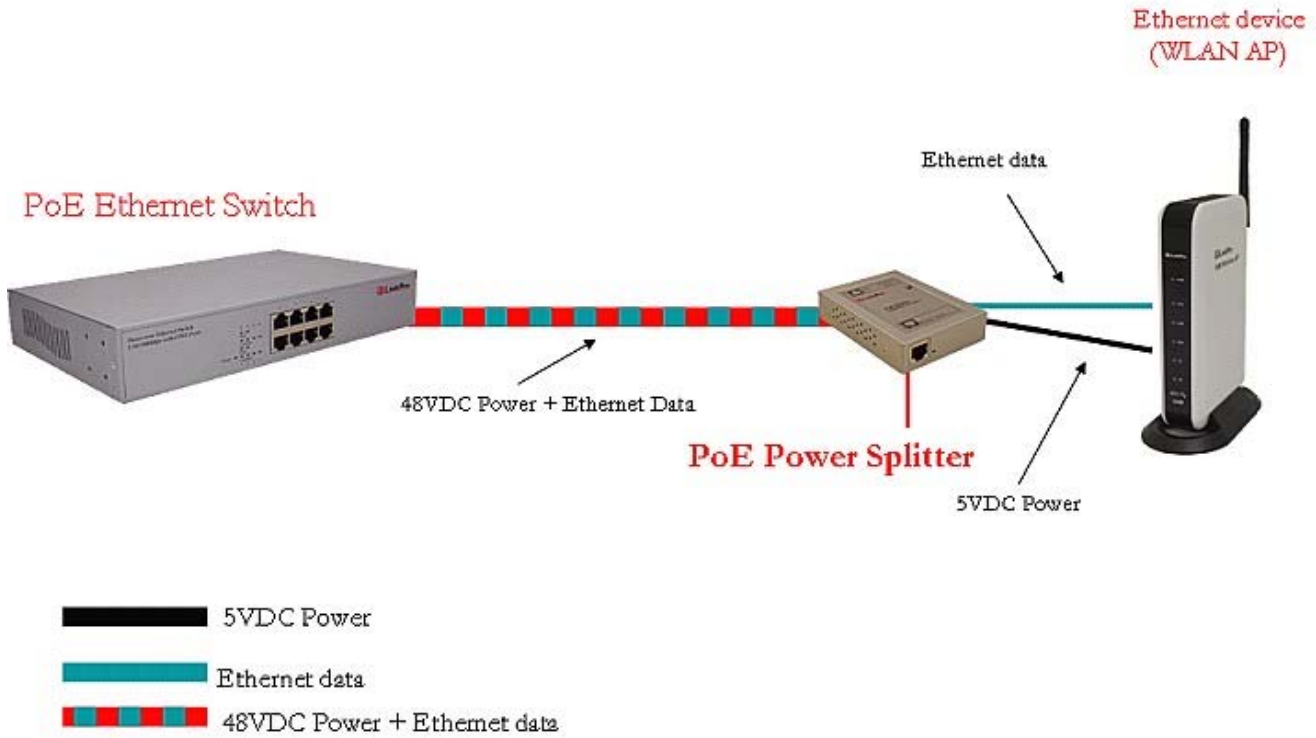

Ordering Information

**POE-808WS: 8 Port 10/100Mbps Web-Managed PoE Switch w/8 PSE port**

*\* Product specification subject to change without notice.*